

ELECTRONICALLY CONTROLLED HYDRAULIC COOLING FAN SYSTEM

BLEEDING

CO070-01

1. CHECK FLUID LEVEL IN RESERVOIR TANK


If low, add fluid.

Fluid:

ATF DEXRON®II or III

HINT:

Check that fluid level is within the "HOT" level on reservoir. If the fluid is cold, check that it is within the "COLD" level on the reservoir.

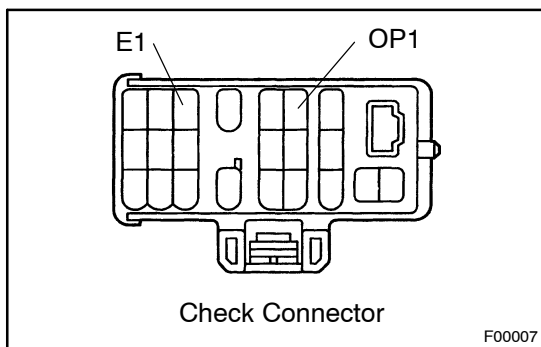

2. BLEED COOLING SYSTEM

- (a) Using SST, connect terminals OP1 and E1 of the check connector.

SST 09843-18020

HINT:

When terminals OP1 and E1 are connected, the circuit of the ECT sensor is grounded, fixing the cooling fan speed at approx. 1,100 rpm. (Fail-safe operation occurs.)

- (b) Start the engine without depressing the accelerator pedal.
- (c) Leave the engine running for several minutes.
- (d) Check that there is no foaming and emulsification of the fluid in the reservoir.
- (e) Remove the SST from the check connector.
- SST 09843-18020