



REAR FLOOR SIDE REAR MEMBER (ASSY)

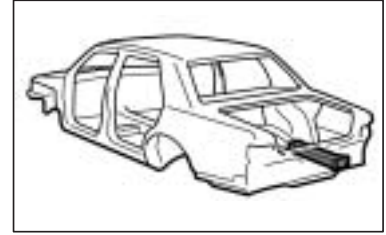


REMOVAL (With the rear floor side member brace removed.)

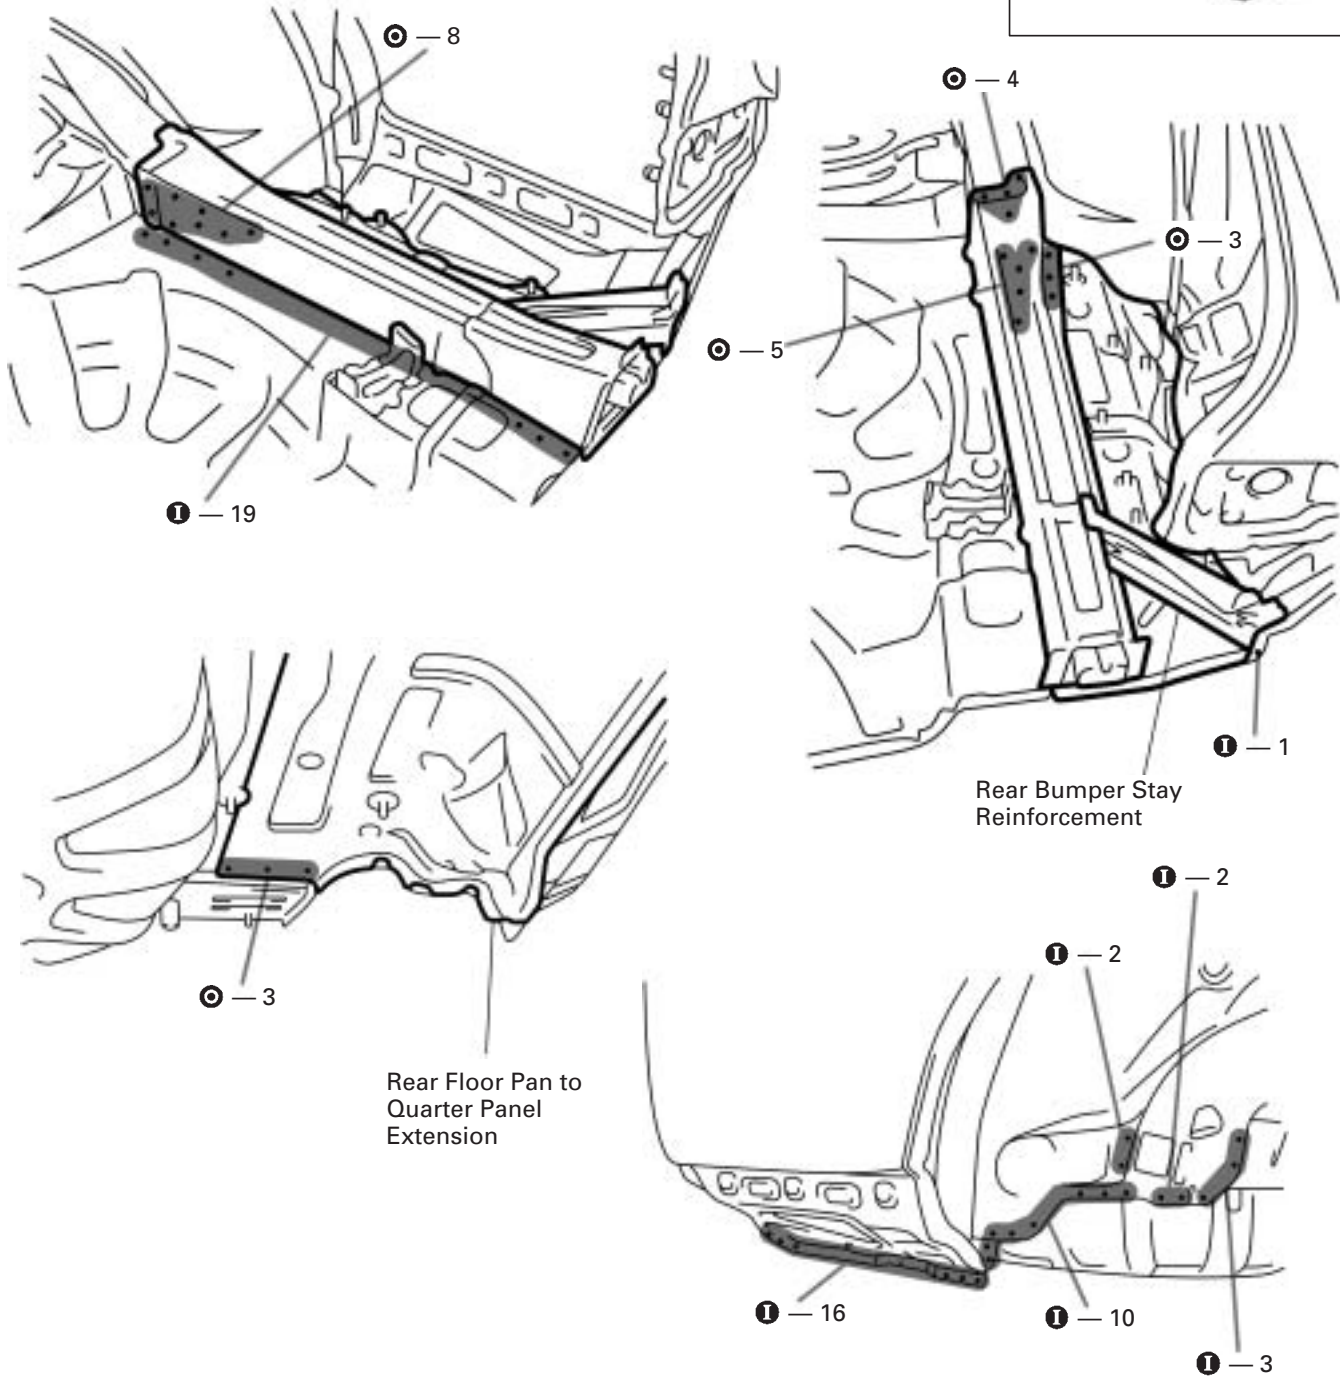

1. Replace the rear floor pan to quarter panel extension and rear bumper stay reinforcement at the same time.

INSTALLATION

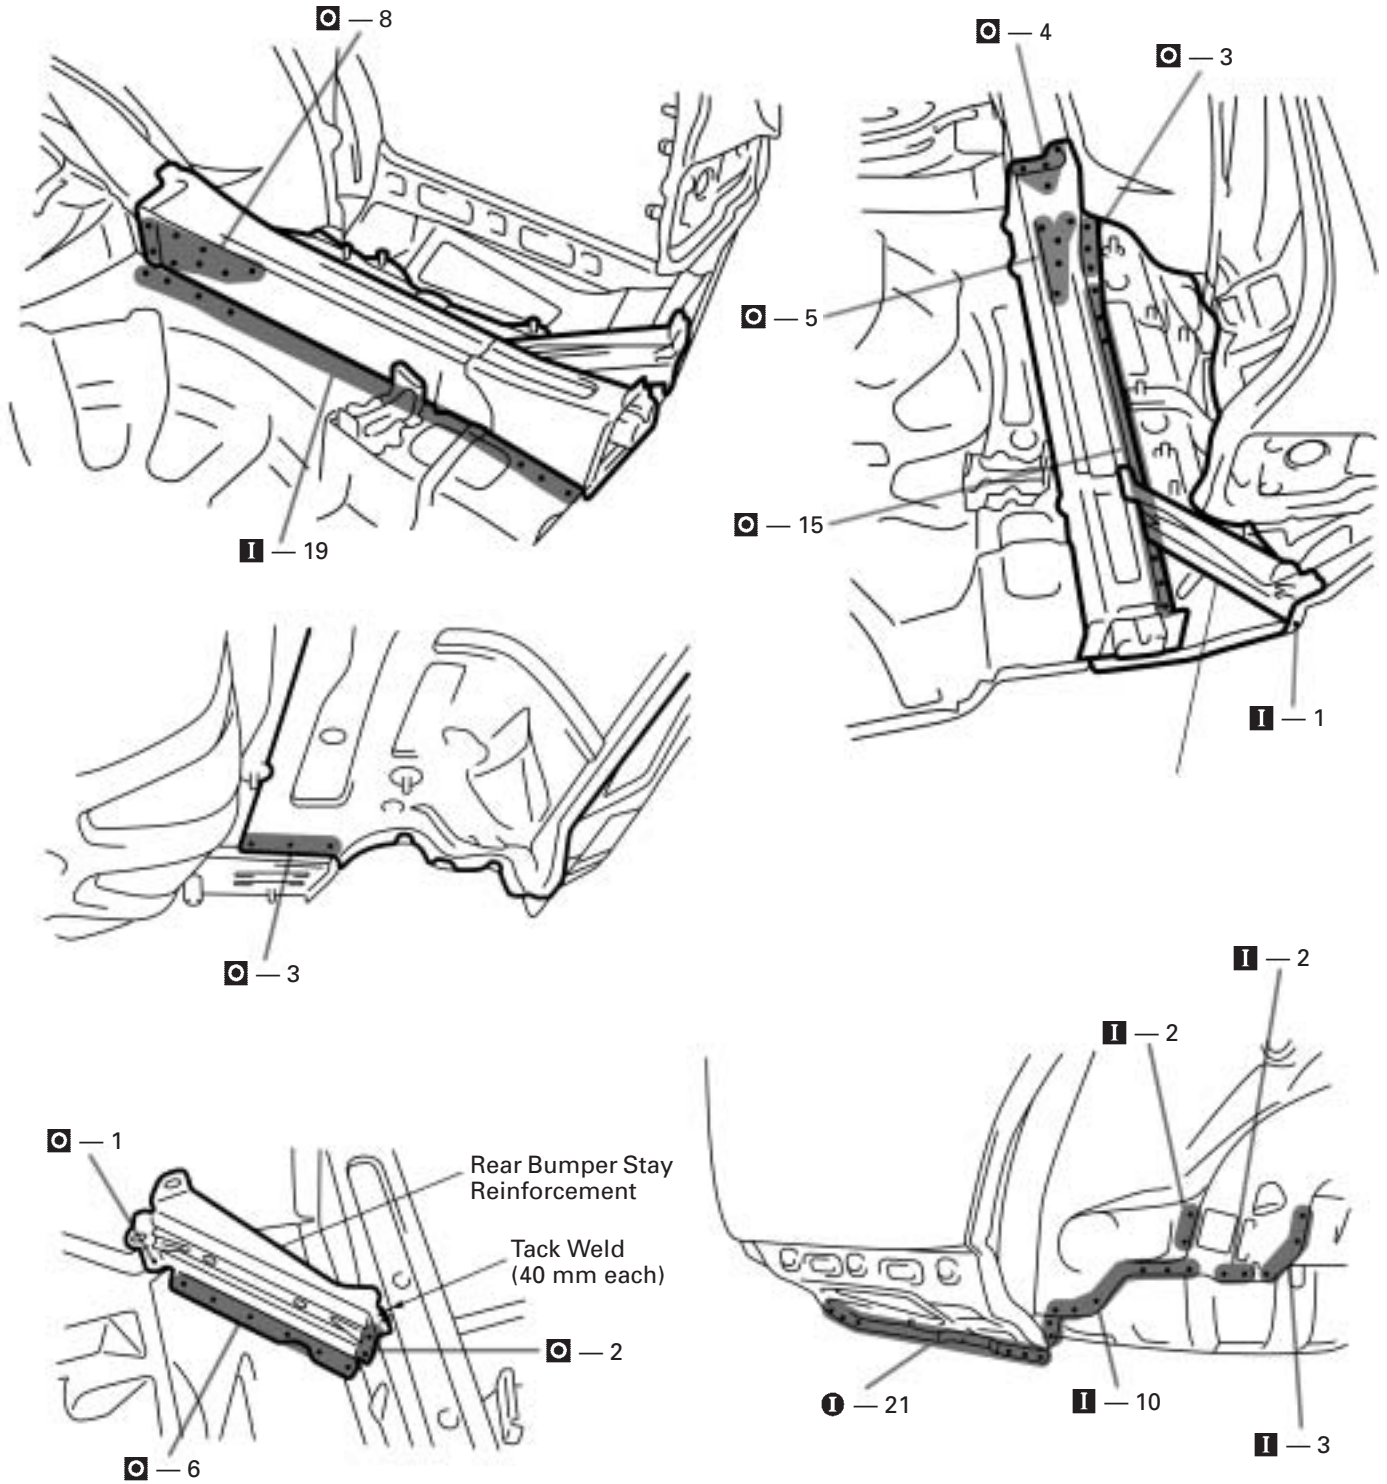

1. Temporarily install the new parts and measure each part in accordance with the body dimension diagram.

mm	in.
40	1.57