


LOWER VALVE BODY

LOCATION COMPONENTS

AT0HA-02

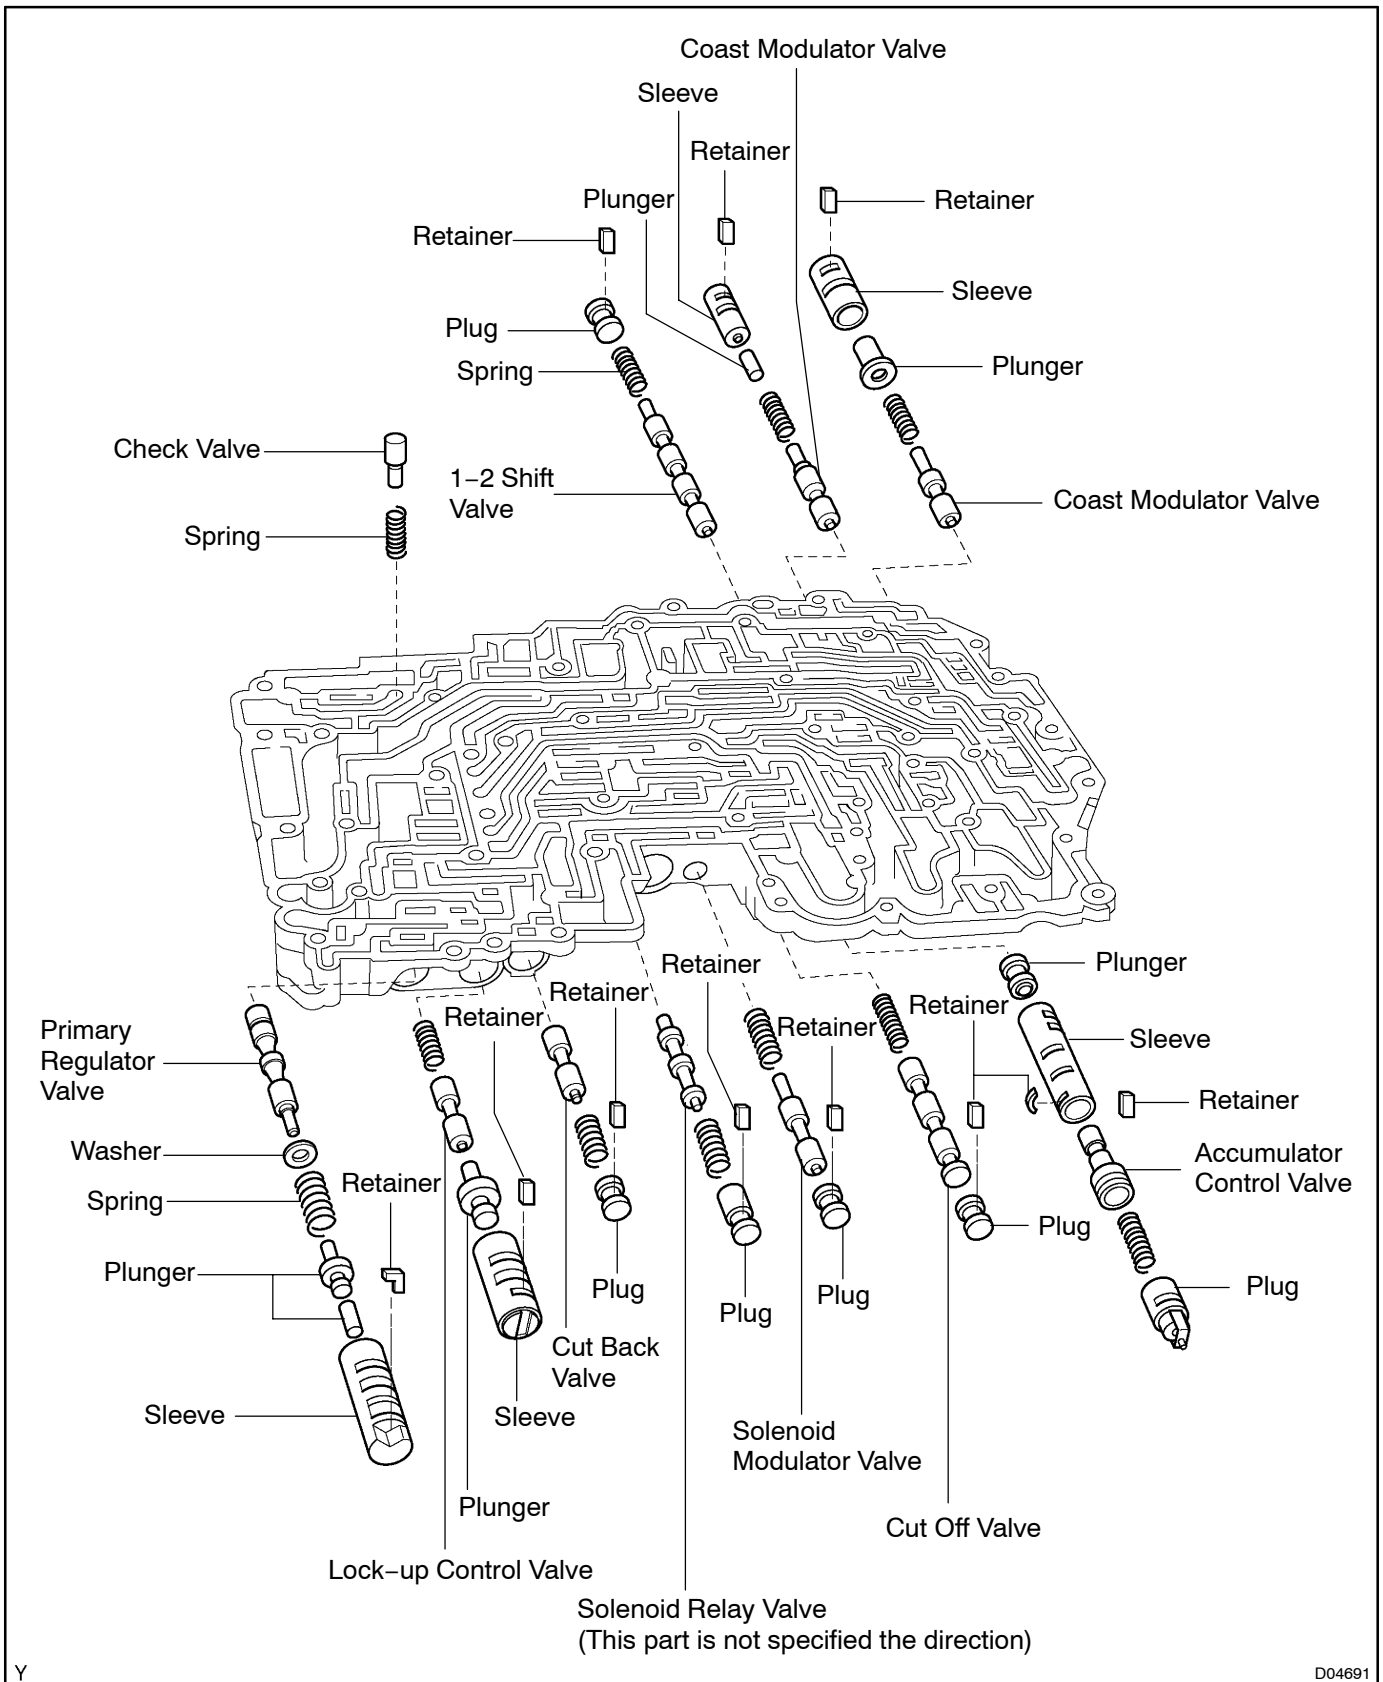


Y

D04691

SPRING**HINT:**

During reassembly, please refer to the spring specifications below to help you to differentiate among the different springs.

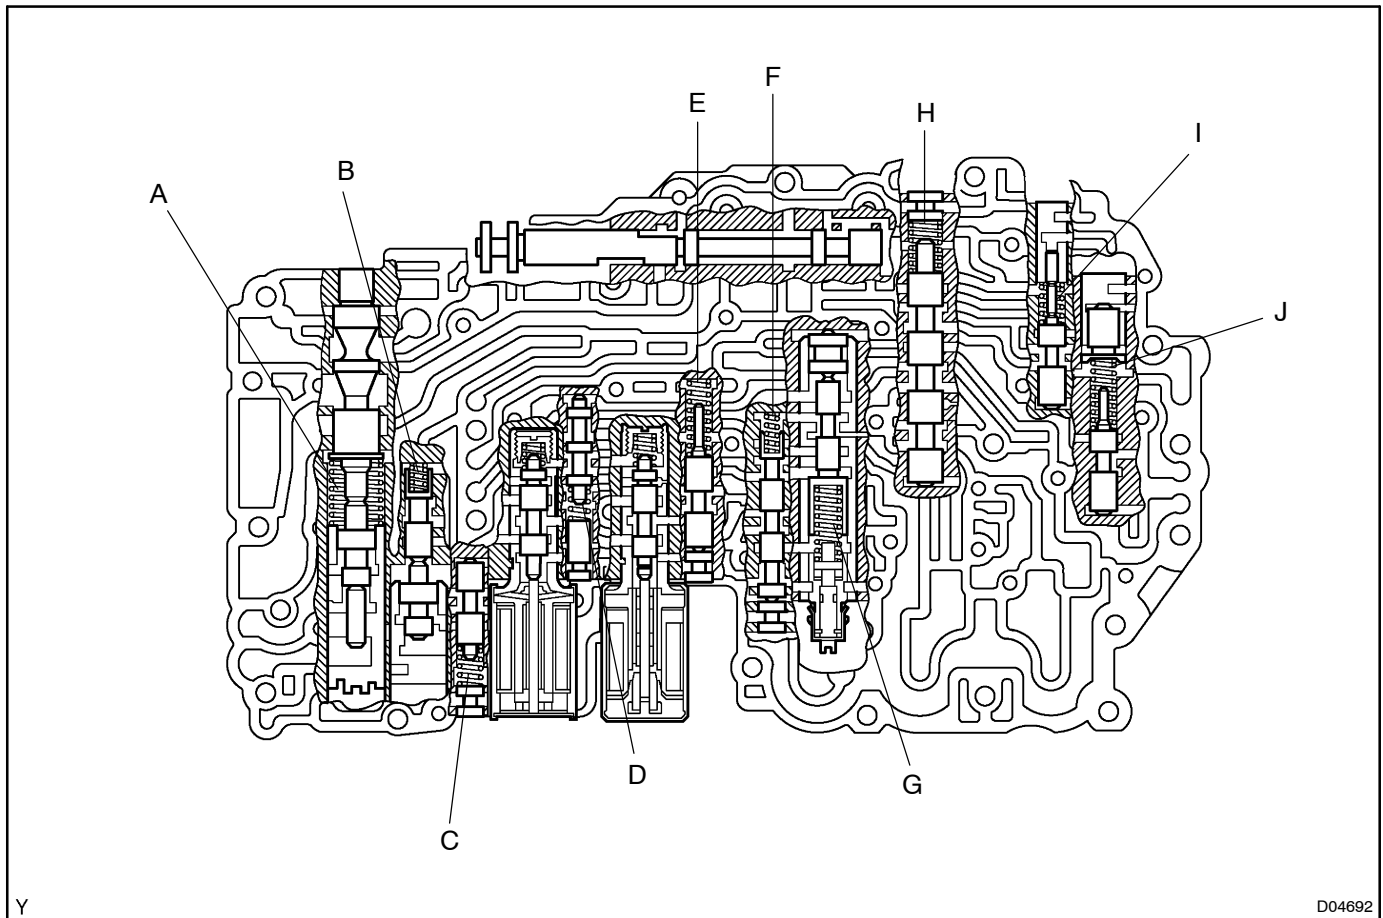


Y

D04692

Mark	Name (Color)	Free length / Outer diameter		Total No. of coils
		mm (in.)		
A	Primary regulator valve (Blue)	45.62 (1.796) / 16.88 (0.665)		9.50
B	Lock-up control valve (White)	18.52 (0.729) / 5.30 (0.209)		12.75
C	Cut back valve (None)	18.80 (0.740) / 7.48 (0.294)		7.50
D	Solenoid relay valve (None)	18.80 (0.740) / 7.48 (0.294)		7.50
E	Solenoid modulator valve (Yellow)	32.13 (1.265) / 8.00 (0.315)		15.75
F	Cut off valve (None)	20.30 (0.799) / 6.10 (0.240)		12.75
G	Accumulator control valve (White)	31.17 (1.227) / 8.85 (0.348)		12.50
H	1-2 Shift valve (Purple)	30.77 (1.211) / 9.70 (0.382)		10.50
I	Coast modulator valve (Green)	21.83 (0.859) / 8.00 (0.315)		10.50
J	Coast modulator valve (None)	25.38 (0.999) / 5.60 (0.220)		12.60

RETAINER

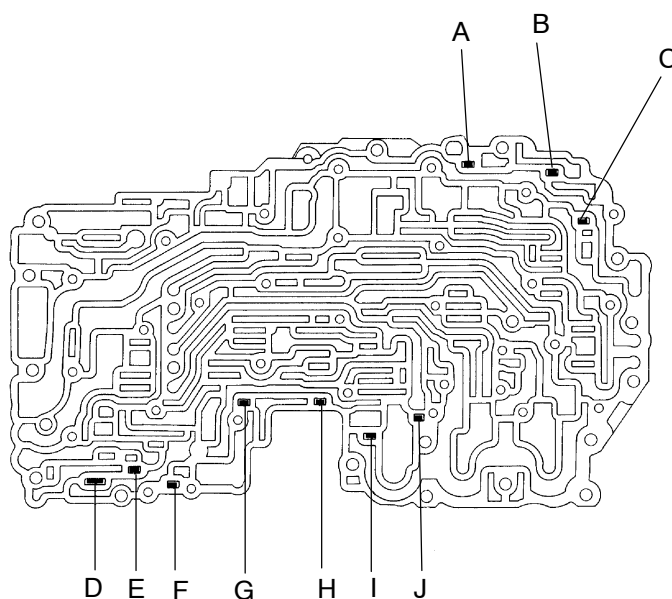

Q03425

Mark	Retainer	Height / Width / Thickness	
		mm (in.)	
A	1-2 Shift valve	14.0 (0.551) / 5.0 (0.197) / 3.2 (0.126)	
B	Coast modulator valve	14.0 (0.551) / 5.0 (0.197) / 3.2 (0.126)	
C	Coast modulator valve	14.0 (0.551) / 5.0 (0.197) / 3.2 (0.126)	
D	Primary regulator valve	13.0 (0.512) / 5.0 (0.197) / 3.2 (0.126)	
E	Lock-up control valve	14.5 (0.571) / 5.0 (0.197) / 3.2 (0.126)	
F	Cut back valve	8.5 (0.335) / 5.0 (0.197) / 3.2 (0.126)	
G	Solenoid relay valve	12.5 (0.492) / 5.0 (0.197) / 3.2 (0.126)	
H	Solenoid modulator valve	14.5 (0.571) / 5.0 (0.197) / 3.2 (0.126)	
I	Cut off valve	19.0 (0.748) / 5.0 (0.197) / 3.2 (0.126)	
J	Accumulator control valve	29.0 (1.142) / 5.0 (0.197) / 3.2 (0.126)	