



FRONT SIDE MEMBER TO DUSH PANEL CROSSEMEMBER (CUT-H)

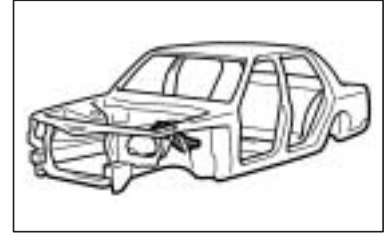

REMOVAL (With the front fender apron, front side member rear No.1 inner reinforce removed.)

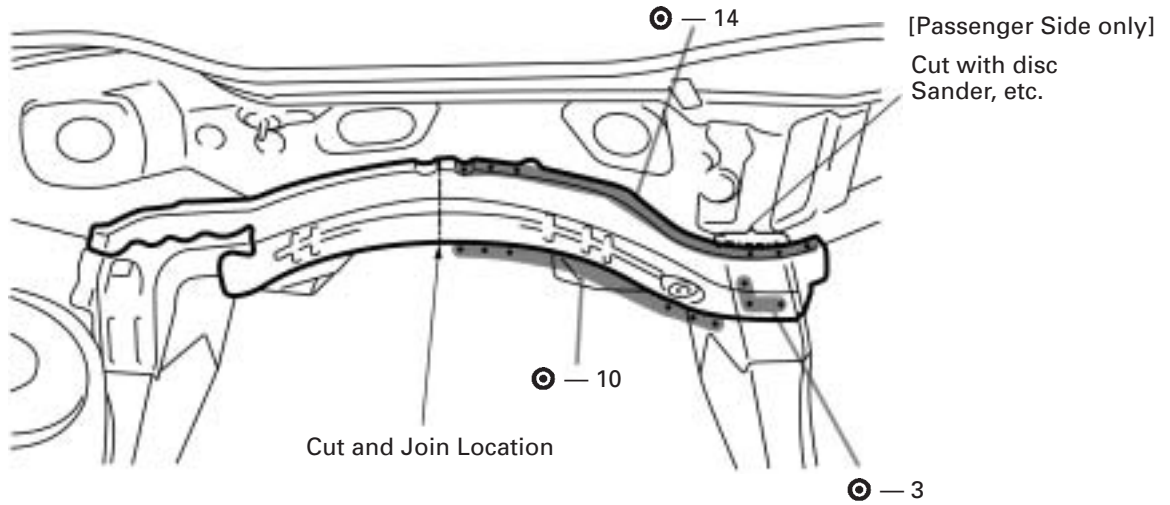


[Cut and Join Location]



1. Cut and join the part at the location (near the center of vehicle) as shown above.

INSTALLATION

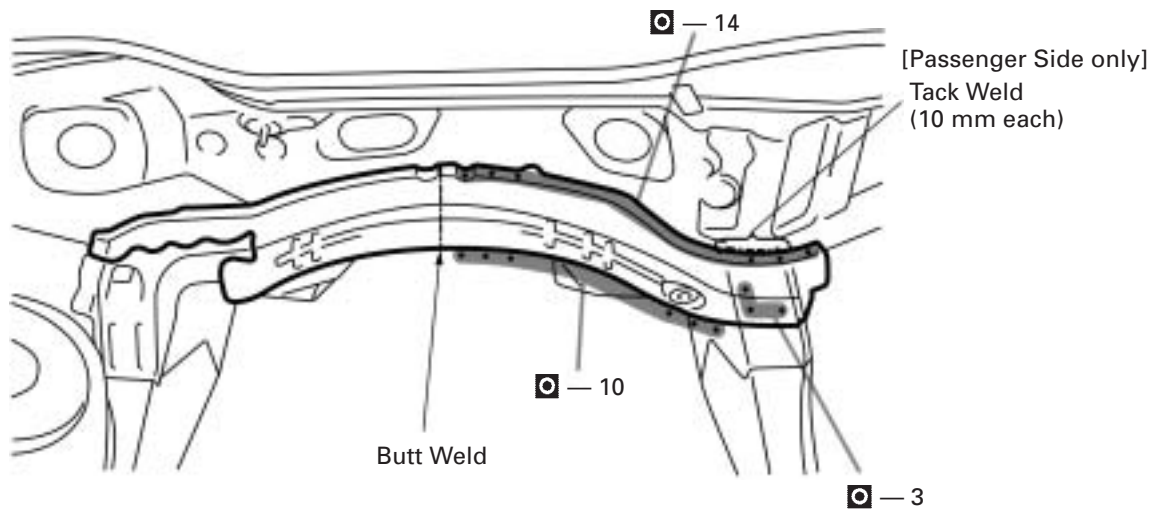

mm	in.
10	0.39