
VALVE BODY SPRING SPECIFICATIONS

HINT: During reassembly please refer to the spring specifications below to help you to differentiate the different springs.

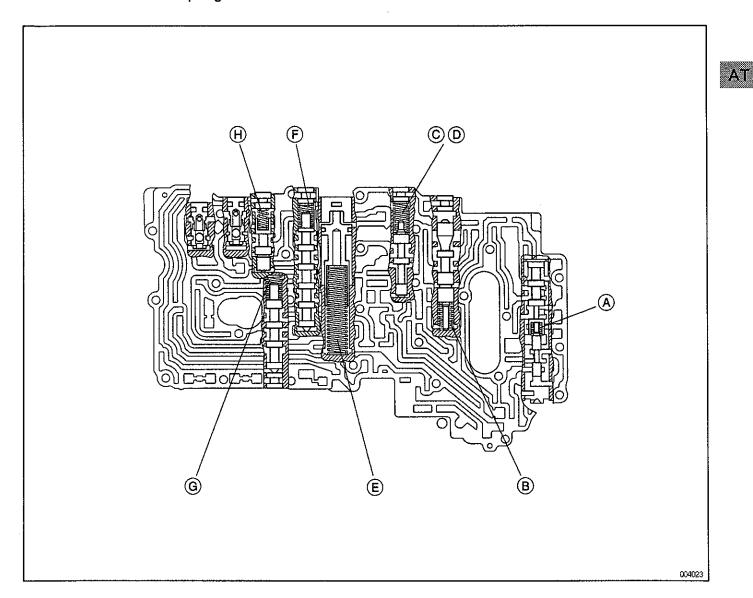

Mark	Name (Color)	Free length / Outer diameter mm (in.)	Total No. of coils
(A)	Lock-up relay valve (Red)	23.42 (0.9220) / 5.86 (0.2307)	12.25
®	Secondary regulator valve (Blue)	32.79(1.2909) / 9.4 (0.3700)	12.75
©	C-1 Orifice control valve (White)	37.13 (1.4618) / 11.14 (0.4316)	11.25
0	C-1 Orifice control valve (None)	21.50 (0.8465) / 7.76 (0.3055)	11.50
Ê	C-1 Accumulator (Pink)	75.26 (2.9623) / 15.02 (0.5193)	17.06
Ê	2-3 Shift valve (Purple)	30.77 (1.2114) / 9.70 (0.3819)	10.50
©	3-4 Shift valve (Purple)	30.77 (1.2114) / 9.70 (0.3819)	10.50
Θ	Reverse control valve (None)	25.58 (1.0070) / 8.64 (0.3402)	8.75