



RETAINERS AND CHECK BALLS LOCATION

1. RETAINERS

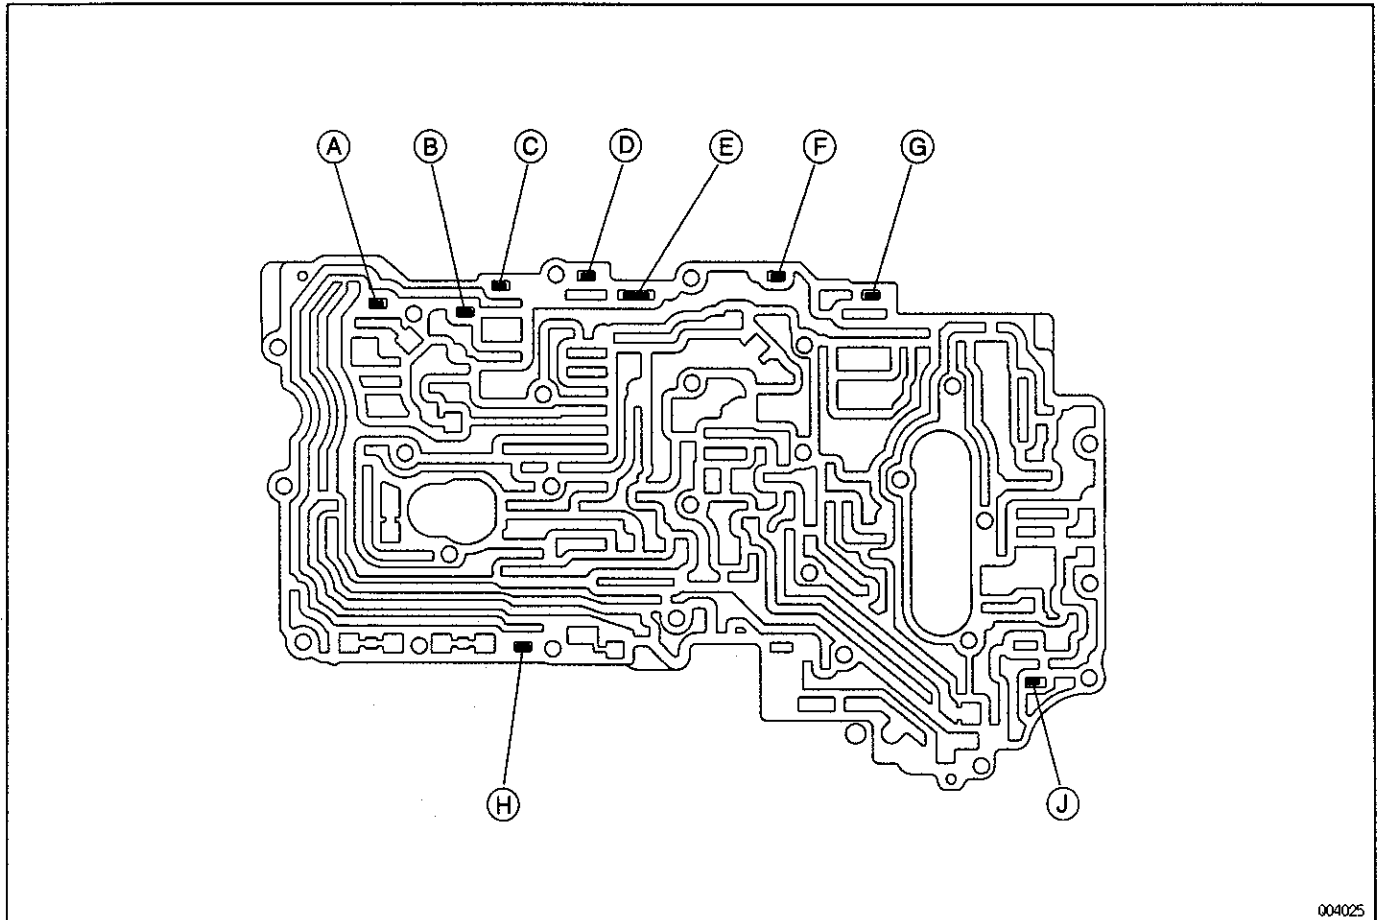

Mark	Retainer	Height / Width / Thickness	
		mm (in.)	
Ⓐ	Check valve	10.0 (0.394)	5.0 (0.197) / 3.2 (0.126)
Ⓑ	Check valve	19.0 (0.748)	5.0 (0.197) / 3.2 (0.126)
Ⓒ	Reverse control valve	16.0 (0.630)	5.0 (0.197) / 3.2 (0.126)
Ⓓ	2-3 Shift valve	12.5 (0.492)	5.0 (0.197) / 3.2 (0.126)
Ⓔ	C-1 Accumulator	37.5 (1.476)	5.0 (0.197) / 3.2 (0.126)
Ⓕ	C-1 Orifice control valve	12.5 (0.492)	5.0 (0.197) / 3.2 (0.126)
Ⓖ	Secondary regulator valve	10.0 (0.394)	5.0 (0.197) / 3.2 (0.126)
Ⓗ	3-4 Shift valve	11.5 (0.453)	5.0 (0.197) / 3.2 (0.126)
Ⓙ	Lock-up relay valve	21.2 (0.835)	5.0 (0.197) / 3.2 (0.126)

2. CHECK BALLS

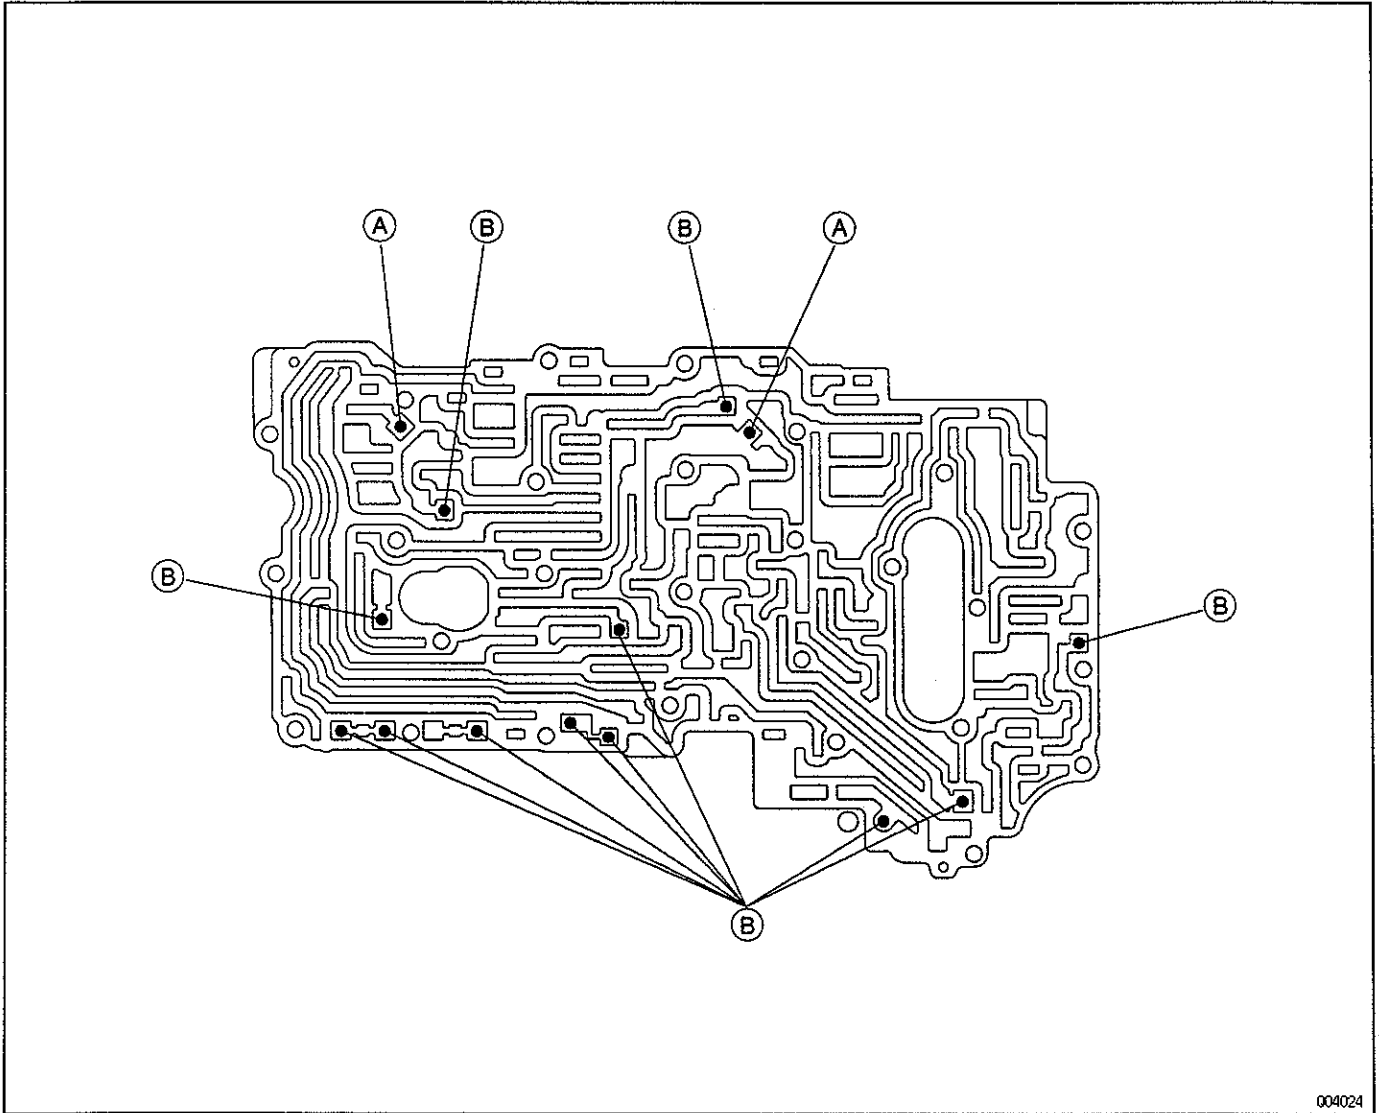

004024

Mark	Check ball	Diameter mm (in.)
Ⓐ	Rubber ball	6.35 (0.250)
Ⓑ	Rubber ball	5.54 (0.2181)