


## FUEL CUT RPM INSPECTION

1. REMOVE V-BANK COVER
2. WARM UP ENGINE

Allow the engine to warm up to normal operating temperature.

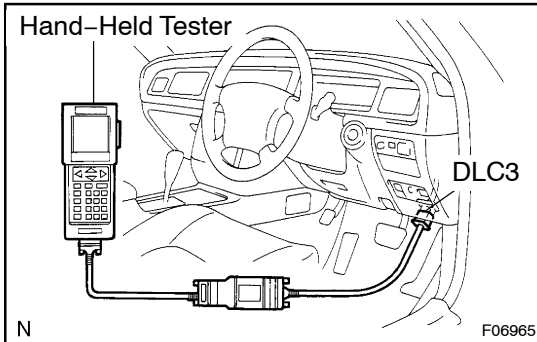

3. CONNECT LEXUS HAND-HELD TESTER OR OBD II SCAN TOOL

- (a) Connect the LEXUS hand-held tester or OBD II scan tool to the DLC3.
- (b) Please refer to the LEXUS hand-held tester or OBD II scan tool operator's manual for further details.

4. INSPECT FUEL CUT OPERATION

- (a) Increase the engine speed to at least 2,500 rpm.
- (b) Check for injector operating noise.
- (c) Check that when the throttle lever is released, injector operation noise stops momentarily and then resumes.

### HINT:

- The vehicle should be stopped.
- Measure with the A/C OFF.

**Fuel return rpm: 1,400 rpm**

5. DISCONNECT LEXUS HAND-HELD TESTER OR OBD II SCAN TOOL
6. REINSTALL V-BANK COVER